




 **CHOICE**<sup>®</sup>  
BY GLASTENDER

**Choice  
Underbar**

A Family Company  
Manufacturing in the USA



# Choice Underbar Features

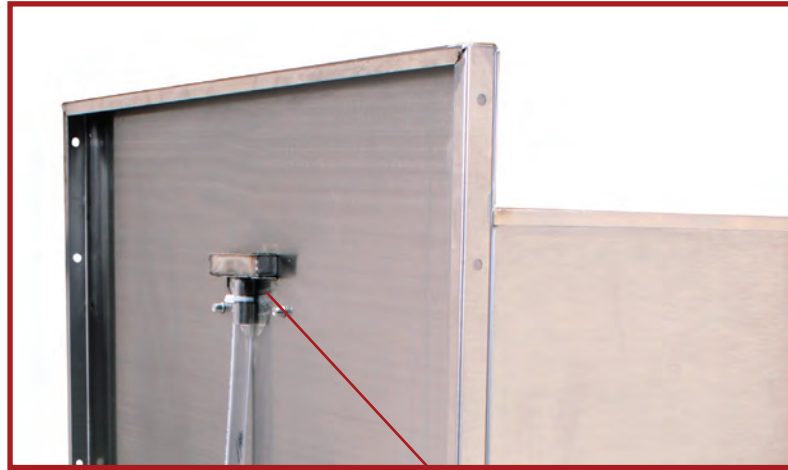


Drainboard cabinets have a unique drain design allowing them to be flush mounted to the bar die wall

20 gauge fabricated multiple sink bowls are 70% thicker than industry standard for greater durability. Over-sized bowl easily accommodates brush washers.



All drainboards have fully corrugated work surface for increased aerated glass storage

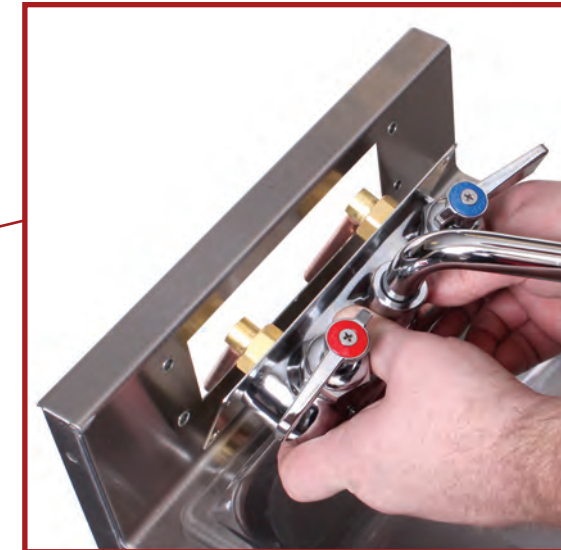

Backsplash faucets are removable from the front of the equipment for easier service




Leg tube set into recessed sockets for added strength




One-piece seamless backsplash and front skirt on combo ice bins is easier to keep clean and more aesthetically pleasing



Threaded inserts for mounting standard size speed rails for easier installation and more secure attachment

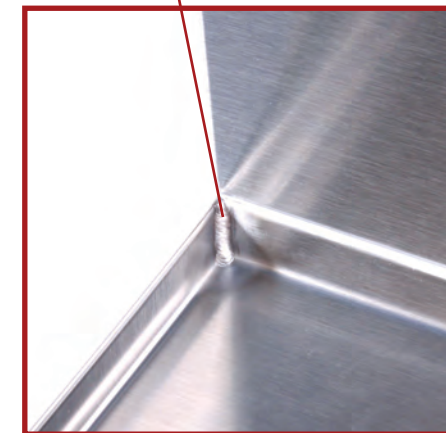

1/4" radius corners on blender shelf are easier to keep clean

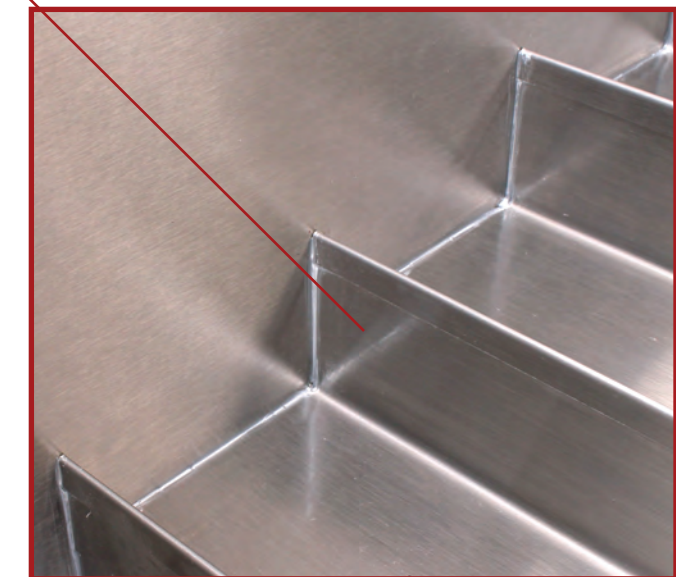

Liquor displays come standard with integral bottle retaining rails




# The main reasons why Choice is superior to **Others**

## Choice Underbar

The Choice underbar line is all stainless steel fabrication.

Choice underbar units (except ice bins and corners) have a one-piece seamless top and backsplash, making them easier to keep clean.

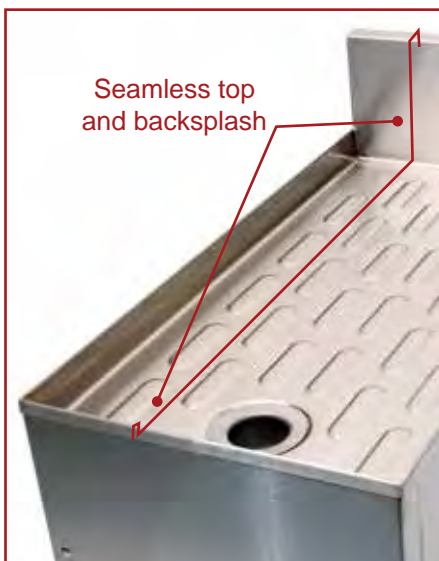

## Common Underbar

Other underbar lines are not all stainless steel fabrication.



Other underbar typically has a siliconed seam at the front rail and backsplash.


Choice underbar is welded construction with bolt-on legs. For greater strength and rigidity, integrated C-channel stiffeners are welded to the backsplash and to the one-piece side and leg pad.



Other underbar is assembled with sheet metal screws. If present, the separate backsplash stiffeners are attached with screws and/or pop rivets.



Choice underbar has a generous 14" skirt providing 13" of bottle clearance, keeping more bottle tops below the work surface.

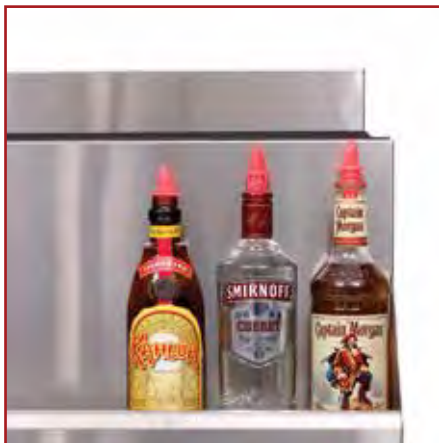

Other underbar has a 12" skirt providing 11-1/2" of bottle clearance.

